

Reflex Drive

RD A-Series ESC 80A (FOC)

MADE IN INDIA

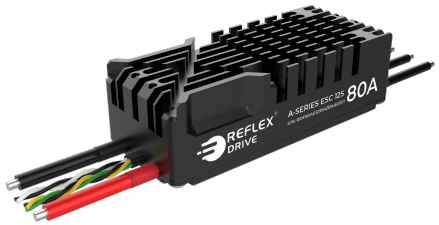

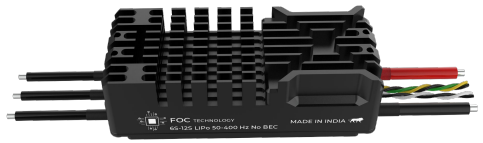

- **Field Oriented Control**
- **Over Current Protection**
- **Startup Protection**
- **Over Temperature Protection**
- **Stuck Rotor Protection**

Email: sales@reflexdrive.in Sales: +91 9151118036 www.reflexdrive.in Lucknow, Hyderabad

Copyright © Sunmint Electronics LLP

Product Description:

The **RD A-Series ESC 80A (FOC) is a next-generation** Electronic Speed Controller (ESC) engineered for ultra-smooth, highly efficient, and whisper-quiet motor control. Powered by advanced Field Oriented Control (FOC) technology to deliver unparalleled precision, maximizing torque even at exceptionally low speeds. Housed in a premium, CNC-machined aluminum enclosure, it offers superior heat dissipation and rugged protection against harsh environmental conditions, making it the ultimate choice for high-performance applications.

Key Features & Benefits

- **True FOC Technology**: Continuously monitors and adjusts the motor's magnetic field for buttery-smooth acceleration, zero-jitter startups, and significantly reduced operating noise.
- **Enhanced Thermal Management**: The sleek aluminum casing acts as a highly efficient heatsink, allowing the ESC to sustain high continuous currents without thermal throttling.
- **Regenerative Braking**: Captures kinetic energy during deceleration and feeds it back into the battery, extending your runtime and overall system efficiency.
- **Real-Time Telemetry & Data Output**: Continuously monitors and outputs critical system data including RPM, voltage, current, and ESC temperature allowing for smart system integration and real-time performance tracking.
- **Intelligent Protections/Warnings**: Equipped with a smart onboard management system that proactively defends against over-current, over-voltage, under-voltage, short circuits, motor stalls, ensuring maximum reliability under heavy loads.

Copyright © Sunmint Electronics LLP

ESC Specifications

S. No.	Parameter	Requirement	Remark
1	Product name	RD A-Series ESC 80A (FOC)	-
2	Voltage range	6S (22.2 V) - 12S (52.2 V)	-
3	Commutation	FOC	-
4	Maximum Peak Current	80 A (30 sec)	Tested at ambient temperature 29.7 ℃ at air speed of 12.5 m/s
5	Maximum Peak Power	4000 W (30 sec)	Tested at ambient temperature 29.7 ℃ at air speed of 12.5 m/s
6	Maximum Continuous Current	55 A	Tested at ambient temperature 29.7 ℃ at air speed of 12.5 m/s
7	Maximum Continuous Power	2750 W	Tested at ambient temperature 29.7 ℃ at air speed of 12.5 m/s
8	Weight	177 g	-
9	Dimension	93 x 38 x 29 mm	-
10	BEC	No	-
11	Operating ambient temperature (℃)	(-20 ℃) ~ (+65 ℃)	±5 ℃
12	Operating humidity (%)	15% ~ 85% RH	±5% RH
13	Standby current (at 48 V)	≤ 80 mA	-
14	PWM range	1050 us ~ 1950 us	-
15	Recommended PWM frequency	50 ~ 450 Hz	-
16	Driving method	PWM & CAN	-
17	ESC Telemetry	Over CAN only	Voltage, Current, Motor RPM, PCB Temperature, Fault status
18	Input Signal Isolation	Yes (PWM only)	
19	Braking Feature	Yes	
20	Invert Motor spin	Yes	Using CAN

** The above mentioned data is measured in Lucknow, India at an altitude of 123 m above sea level.

Copyright © Sunmint Electronics LLP

Protection / Warnings

S No.	List of Protection / Warning	Protection / Warning Scenario
1	Over-temperature warning (OTW)	PCB temperature above 110 ℃
2	Stuck Rotor protection at start-up	Motor stuck or can't rotate
3	Bad Motor Phase protection at startup	Motor phase not connected properly
4	Over Voltage Protection (OVP)	Voltage above 67 V
5	Under Voltage Protection (UVP)	Voltage below 20 V
6	Overcurrent protection (OCP)	Peak current above 120 A
7	Motor phase short circuit protection	Two phases of the ESC output are electrically shorted
8	Signal Loss Protection & Warning	ESC is not receiving the PWM or CAN throttle

** All protections and warnings will be visible over CAN telemetry.
Note: Please refer to the **Reflex Drive A-Series FOC ESC User Manual** for full specifications, protections and warning.

Copyright © Sunmint Electronics LLP


Wire and Enclosure Specification

S. No.	Item	Wire colors / Size	Length	Remarks
1	Input cables	Silicone wires - red/black - 12 AWG	10 cm	±1 cm
2	Output cables	Silicone wires - black - 14 AWG	12 cm	±1 cm
3	Signal wires	Silicone wires - black, white (2P)	19 cm	±1 cm
4	CAN wires	Silicone wires - black, white, red (3P)	19 cm	±1 cm
5	Enclosure	Aerospace grade Aluminium - black anodized		


Copyright © Sunmint Electronics LLP

Technical Drawing


Note: All dimension in mm

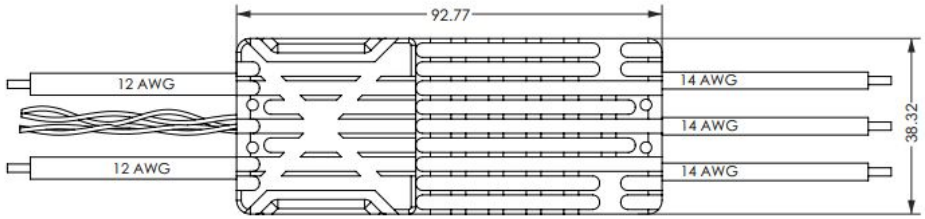

TOP VIEW

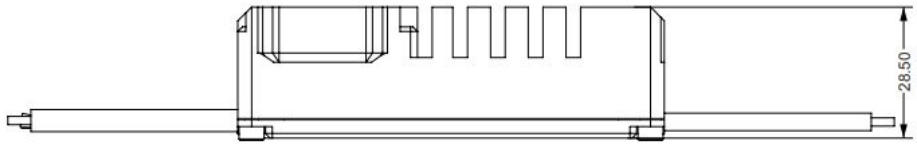


SIDE VIEW

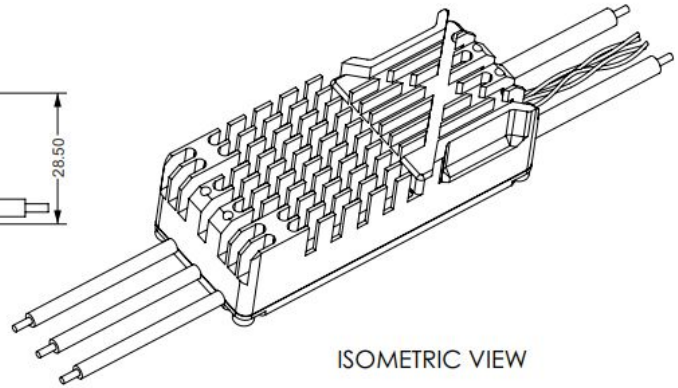

ISOMETRIC VIEW

Mounting Hole
4 X M3 Threaded

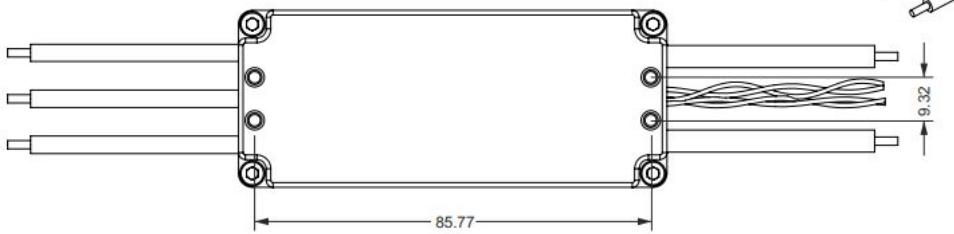

BOTTOM VIEW

Copyright © Sunmint Electronics LLP

Recommended Motor Table

ESC	Motor	Voltage Range	Propeller
RD A-Series 80A 12S ESC	RD 6218 160 KV Motor	12S (LiPo)	RD 2480 (Foldable)
	Vector Technics 8015 Pro 100 KV Motor	12S (LiPo)	Vector 3010 (Foldable)
	RD 8015 115 KV Motor	12S (LiPo)	HW 3010 (Foldable)

Copyright © Sunmint Electronics LLP